

# UC11-T1


# Temperature & Humidity Sensor



## ► Features

- Robust LoRa connectivity for continuous temperature & humidity monitoring in harsh environments
- IP65 rating waterproof
- 11km communicate range
- LoRaWAN v1.0/v1.0.2
- Ursalink Cloud compliant
- 5-Year battery life
- Replaceable battery

## Application Example

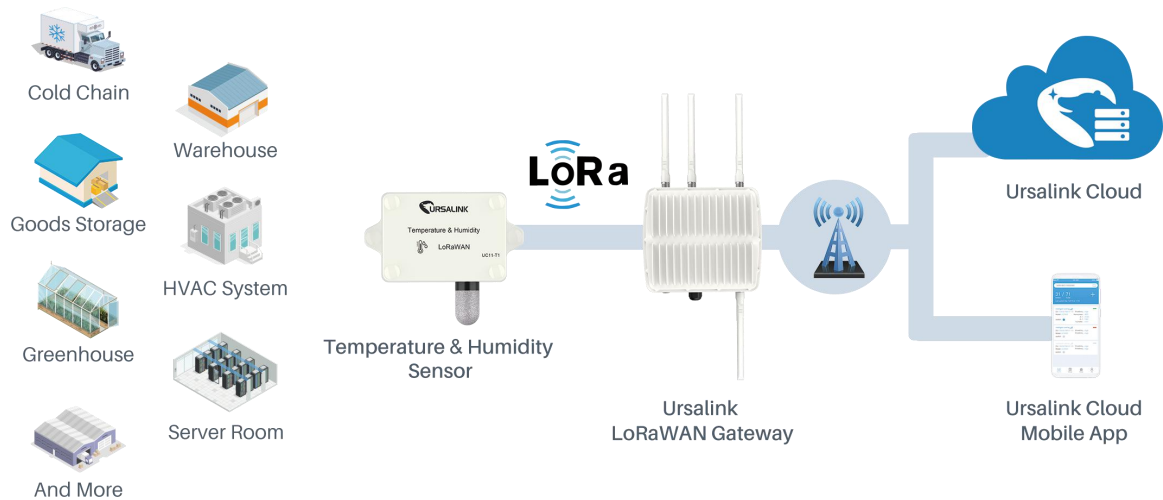

## Specifications

LoRaWAN	
Frequency	EU433/CN470/IN865/EU868/US915/AU915/KR920/AS923
Tx Power	20dBm
Sensitivity	-147dBm @300bps
Mode	OTAA/ABP Class A
Measurement	
Temperature Range	-40°C to + 70°C
Temperature Accuracy	0°C to + 70°C (+/- 0.3°C), -40°C to 0°C (+/- 0.6°C)
Humidity Range	0% to 100% RH
Humidity Accuracy	10% to 90% RH (+/- 3%), below 10% and above 90% RH(+/- 5%)
Physical Characteristics	
Operating Temperature	-40°C to +70°C
Relative Humidity	0% to 100% (non-condensing)
Dimension	111 × 92 × 33 mm (4.3 × 3.6 × 1.3 in)
Weight	147 g
Power Input	8000mAh replaceable Li-SOCL2 battery